

CDC Series


DSP-dedicated transcoding helps you build robust IP or Asterisk-based systems to handle high traffic calling as well as strategic expansion without constraints of host processor.

- Bi-directional transcoding between G.729A and G.711
- 50, 100 and 150 ports available for high-density transcoding

The CDC series is DSP-enabled hardware with dedicated DSP resources for transcoding. Combined with the CDC series, Asterisk, any other open sources or host-based IP platform can handle complex codec translation between G.729A and G.711 (A-law or μ -law) for the purposes of call origination or termination in the hybrid VoIP and TDM networks, with minimal hitting to host CPU.

Under constraint of processor capability, the CDC series leverages dedicated DSP algorithm to help you design versatile, high-scalability open source solutions in complex networking environments where minimal utilization of host processor, high-traffic call processing or system expansion for higher density is required. It not only improves performances of Asterisk-based application, but also eliminates limitation of existing bandwidth. The CDC series has been considered as more cost effective and high-performance transcoding algorithm when compared with CPU's consumption for that purpose.

The PCI-2.2 compliant, half-length CDC series cards are the perfect substitute to Digium's TC400B for its cost advantages and certified DSP algorithm. For a variety of environments, each card is designed to support 50, 100 or 150 bi-directional codecs transformations and be seamlessly compatible with Synway's TEJ and FXM series.

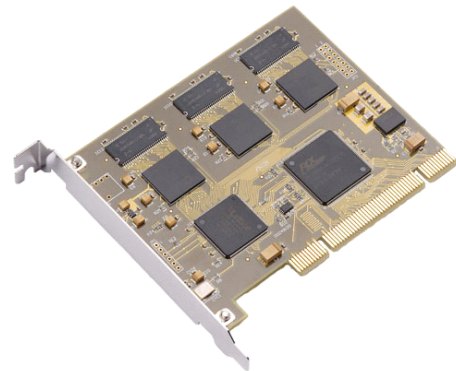

Key features and benefits

Seamlessly compatible with all Asterisk features

The CDC series is perfectly compatible with all Asterisk, helping Asterisk-based applications developers deliver cost-effective, feature-rich and highly accessible solutions.

PCI 2.2 Bus compliant

Includes PCI 2.2 bus with burst data transmission rate up to 132 MB/s; PNP (plug and play) feature eliminates the need for jumper leads; the universal PCI design supports 3.3V/5V PCI slot and PCI-X slot.

DMA data exchange

32-bit bus master DMA data exchanges across PCI interface at 132MB/s for minimum host processor intervention. The use of PCI-based DMA technique for data exchange minimizes utilization of the host CPU.

Transcoding capability

The dedicated DSPs process the codec translations among G.711 A-Law, μ -Law and G.729A, which minimizes consumption of host CPU in all demanding situations and guarantees high scalability when system expansion is required. Each can handle 50, 100, or 150 bi-directional decompression (A-law to G.729A) or compression (G.729A to A-law).

Technical Specifications

Product models

CDC-1522A/PCI, 50-channel bi-directional transcoding
CDC-2522A/PCI, 100-channel bi-directional transcoding
CDC-3522A/PCI, 150-channel bi-directional transcoding

From G.729A to A-Law, μ -Law

Audio Encoding

From A-Law, μ -Law to G.729A

Physical characteristics

Dimensions: 120×95mm² (excluding L-bracket)
Weight: approx. 100g

Audio CODEC

A-Law 64kbps
 μ -Law 64kbps
G.729A 8kbps

Sampling Rate: 8kHz

Environment

Operating temperature: 0°C—55°C
Storage temperature: -20°C—85°C
Humidity: 8%—90% non-condensing
Storage humidity: 8%—90% non-condensing

Certification

CE, FCC Part 15 Class A and Class B , EN 55022, EN 55044, CISPR 22, CISPR 24
Safety: Lightning resistance: Level 4

Audio Specifications

CODEC: CCITT A/ μ -Law 64kbps
Distortion: $\leq 3\%$
Frequency response: 300-3400Hz (± 3 dB)
Signal-to-noise ratio: ≥ 38 dB
Echo suppression: ≥ 40 dB

Warranty

6-years warranty, refundable 2-month return, lifetime maintenance, free support

Power Requirements

Maximum power consumption: ≤ 8 W

Production Quality

ISO 9001:2000

Environment standard

RoHS

Audio Decoding

About Synway

Synway specializes in providing superior media processing & signaling technologies as well as high-performance CTI components in use for convergence (voice/data/video) communications for CTI software developers and system integrators worldwide. With decades of expertise in voice communications, Synway's offerings, including its robust, versatile CTI hardware and platforms, are applied to design a broad range of TDM or VoIP-based applications and services, such as unified communications, call center, Telco value-added services(SMS/CRBT/DIALING), media gateway, signaling, fax, conferencing, passive call recording, open source applications and more.

For two decades, Synway has consolidated its position as a leading hardware and platform vendor in international market. Having been working with thousands of partners over time across the world, Synway has achieved the robust portfolios for passive call recording applications in call center and financial institutes: the most diverse product ranges, greatest scalability, greatest compliance with multi-protocols and multi-networks, and the most installations worldwide. For Asterisk open-source applications, Synway leverages its patent-owned DSP expertise for data processing, echo cancellation and transcoding, helping solution providers create high-scalability, cost effective, flexible, user-friendly systems. For more information, please visit us at <http://www.synway.net> or [contact us](#).

WWW.SYNWAY.NET

Synway Information Engineering Co.,Ltd.

Add: Synway R&D Building, No.3756 Nanhuan RD. Hang Zhou, China 310053

Tel: (86) 571 8886 1158 & (86) 571 8886 0561

Fax:(86) 571 8885 0923

Email:sales@synway.net



INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH PRODUCTS OF SYNWAY. NO LICENSE, EXPRESS OR IMPLIED, IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN SYNWAY'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, SYNWAY ASSUMES NO LIABILITY WHATSOEVER, AND SYNWAY DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF SYNWAY PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

Synway products are not intended for use in medical, life saving, life sustaining, critical control or safety systems, or in nuclear facility applications.

Synway may make changes to specifications, product descriptions, and plans at any time, without notice. This document has been prepared in good faith and is based on information which we believe is accurate and reliable. However, because this information has been derived from a number of different sources, including third parties, no warranties or assurances, express or implied, can be given to the effect that this report is complete and error-free.

Synway disclaim all implied warranties, including warranties as to merchantability or fitness for a particular purpose, and exclude all liability (including liability for negligence) in relation to your use of this document.