




Synway CTI Series

SHF-4D/PCle

Analog Fax Board

Product Introduction

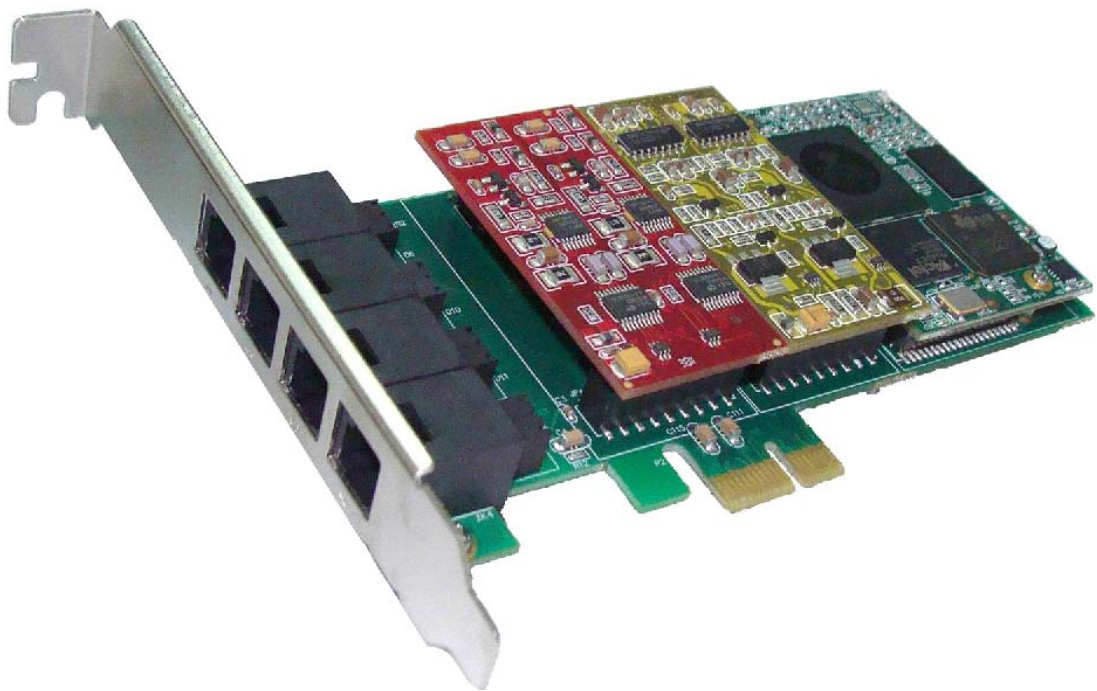

Synway Information Engineering Co., Ltd

www.synway.net

➤ Functions

- A single SHF-4D/PCIe board can be installed with at most 2 dual-channel modules and support 4 voice or fax channels
- Support of the modem standards V.34, V.17, V.29, V.27ter and V.21, the rate up to 33.6kbps which can be reduced on the self-adaptive basis, and the V.8 modem negotiation protocol
- Support ring-alert for external calls
- Station phones on-hook/off-hook detection
- Direct connection between trunk and station keeps call uninterrupted during power outage
- Calling party info (Caller ID) detection/transmission, DTMF and FSK support
- Activity/silence detection
- Automatic Gain Control (AGC) support in recording operation
- DTMF transmission and detection
- Board TDM support
- Automatic line voltage detection
- Automatically checks the board to determine the number and type of modules on the board
- Each board has a unique hardware serial number written in the firmware to distinguish itself from other boards and prevent piracy. The number is available via an easy function call with applications
- The on-board authorization code identification circuit is designed for software safety. Users can apply to our company for the authorization code
- The on-board lightning-proof circuit reaches the telecom standard and eliminates the damage caused by the lightning
- Support 16ms echo cancellation

➤ Characteristic Features

- **PCI Express 2.0 Bus Support**

Includes PCI Express 2.0 bus with 32/64-bit PCI Express slot and 3.3V/5V slot voltage;

operable on device platforms which support PCI Express.

- **Module Configurable**

The on-board dual-channel modules can be freely arranged in pairs or groups for various complex multi-functional applications.

- **Interface**

The on-board RJ11 jack can connect directly to telephone lines, making connection easy and malfunctions rare.

- **Power**

The power is supplied by PCI Express slot, eliminating the need for external power source.

- **Indicator**

Rear projection indicators. We make use of the gaps between RJ11 jacks and the light-admitting quality of the jack to hide the indicators behind the RJ11 jacks. Such design not only ensures the neatness of the board, but also allows you to get the module type and errors in running without opening the main frame.

- **Programmable Tone Detector**

Detects single or dual tones at any frequency, offering facility for use with a variety of PBXes and key telephone systems.

- **Professional Driver Algorithm**

Uses SPECDial - a professional driver algorithm - to perform a complete automatic dial process through analog lines, accurately identifies called-party statuses and precisely distinguishes an answering machine from a fax machine that is responding at the remote end.

- **Echo Cancellation**

The self-adaptive echo cancellation feature effectively eliminates echoes under various conditions, which cancels out the effect of voice playback on DTMF and busy tones detection, avoids self-excited oscillation and howling, and minimizes the possibility of registering wrong DTMF and busy tones in a conference call.

- **Various CODECs Support**

Offers a large selection of voice CODECs, including hardware-based A-law, μ -law, IMA-ADPCM, software-based 16-bit linear PCM, MP3 and VOX.


- **Supports WAV File**

The recorded voice files can be edited and played by audio tools such as Cooledit.


- **Synway's Unified SynCTI Driver Development Platform**

Synway owns the intellectual property rights for the unified high-intelligence SynCTI driver development platform. Each system supports up to 2048 channels. Functions such as the detection and analysis of rings, tones and Caller IDs, are available via simple function calls on the driver platform, without having to understand complex call procedures.

➤ Operation Principle

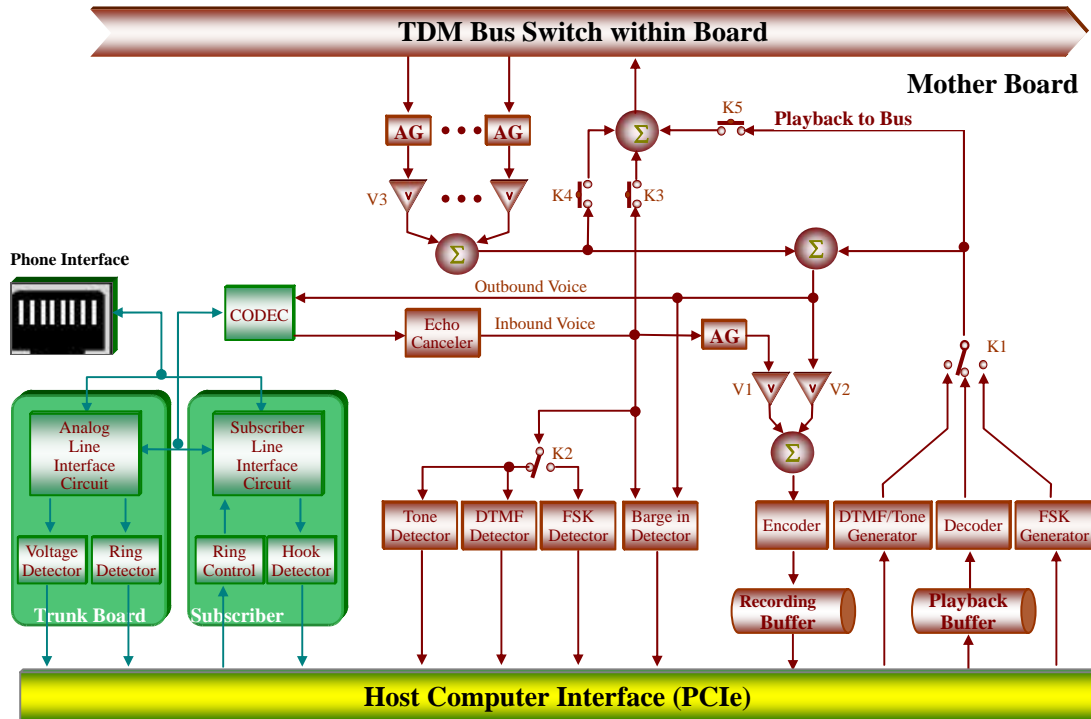

➤ Typical Application

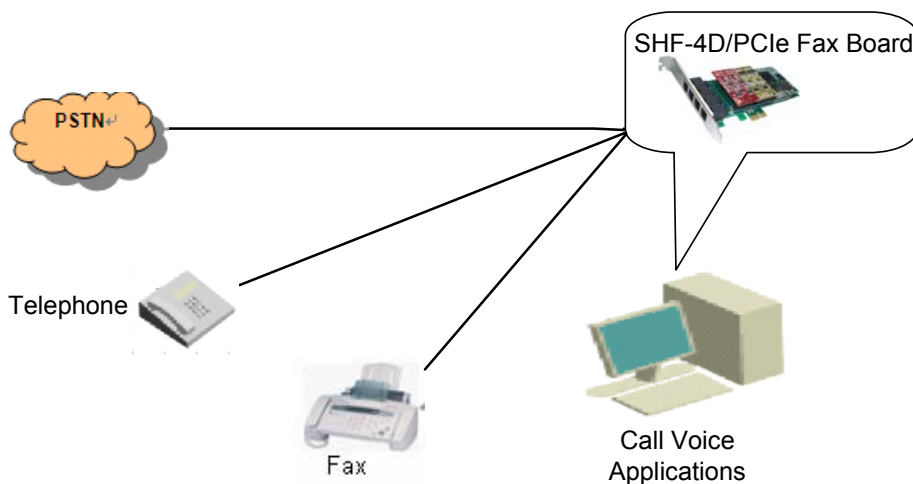

➤ Technical Specifications

Dimensions

132.5x68.5 mm² (excluding L-bracket)

Weight

Motherboard: about 70g
(excluding modules)

Module: about 10g

Environment

Operating temperature: 0 °C—55 °C

Storage temperature: -20 °C—85 °C

Humidity: 8%—90% non-condensing

Storage humidity: 8%—90%
non-condensing

Input/output Interface

Telephone line jack: 4 4-pin RJ11

Audio Specifications

CODEC: CCITT A/ μ -Law 64kbps

IMA ADPCM 32kbps

Distortion: $\leq 3\%$

Frequency response: 300-3400Hz
($\pm 3\text{dB}$)

Signal-to-noise ratio: $\geq 38\text{dB}$

Echo suppression: $\geq 40\text{dB}$

Maximum System Capacity

Up to 100 channels concurrently per system

Power Requirements

Only motherboard

(with modules fully inserted)

+3.3V DC: 1500mA
(power consumption: 4.95W)

+12V DC: 500mA
(power consumption: 6W)

Impedance

Insulation resistance for PC isolation
from telephone line: $\geq 2\text{M}\Omega/500\text{V DC}$

Telephone line impedance:

Compliant with the national standard
impedance for three-component
network

Audio Encoding & Decoding

16Bit PCM 128kbps

8Bit PCM 64kbps

A-Law 64kbps

μ -Law 64kbps

VOX 32kbps

ADPCM 32kbps

GSM 13.6kbps

MP3 8kbps

Sampling Rate

8kHz

Safety

Lightning resistance: Level 4

➤ Purchasing Guide

The Synway CTI Series SHF-4D/PCIe fax board provides a complete range of features to meet all requirements.

➤ Model Description

Model	PC Bus	Voice Channels	Conferencing	Enhanced Echo Cancellation	Faxing	Board TDM	Between-board TDM
SHF-4D/PCIe	PCIe	4	√	√	√	√	—

➤ Technical/sales Support

Headquarters

Synway Information Engineering Co., Ltd

<http://www.synway.net/>

9F, Synway D&R Center, No.3756, Nanhuan Road, Binjiang District, Hangzhou, P.R.China, 310053

Tel: +86-571-88860561

Fax: +86-571-88850923

Technical Support

Tel: +86-571-88864579

Mobile: +86-18905817070

Email: techsupport@sanhuid.com

Email: techsupport@synway.net

MSN: synway.support@hotmail.com

Sales Department

Tel: +86-571-88860561

Tel: +86-571-88864579

Fax: +86-571-88850923

Email: sales@synway.net

TIPS

- All the content and data herein have been scrupulously checked. However, we do not guarantee the absence of errors.**
 - Product specifications and relevant data are subject to conditions on the purchase contract.**
 - Our company reserves the right to modify this document without prior notice and the right for final explanation.**
-